
Specifications Sheet

5/8” Performa™

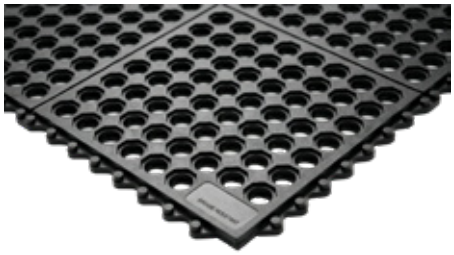

Product No. # 39-078-0920 (Black Grease-Resistant)
5/8” Rubber-molded drainage mat and anti-fatigue matting

Compound:	Natural Rubber
Nominal Thickness:	.625” (15.88 mm)
Weight:	approx. 22 Lbs.
Top Surface Texture:	Octagonal recessed Drainage holes
Edges:	One-sided connectors allow you turn mats around to connect them together.
Tabor-Abrasion:	<1% Loss:Taber 1000 Grams, 1000 Revs, ASTM D-3884 H-18 Wheel
Grease-Resistance:	Yes
Durometer/Hardness:	60 +/-5 Shore ‘A’ ASTM D-2240 (6 months aging is negligibleΔ)
Durometer/Hardness:	Dry co-efficient of friction (Avg. .79) ASTM C-1028 Wet co-efficient of friction (Avg. .69) ASTM C-1028 ADA (American Disabilities Act) requires .6 or higher.
FMVSS 302:	Pass

info@sarax.com.mx
818 333 3335
811 910 1772

www.sarax.com.mx

Pablo Moncayo N° 147, Colinas de San Jerónimo, Monterrey, Nuevo León

Resistance to Chemicals/Fluids:	
Acetic Acid –3	**Acetone** -3
Animal Fats -2	**Brake Fluid** -2
Butyl Alcohol -2	**Chlorine Wet** -3
Cutting Fluid (wb) -2	**Cutting Fluid (so)** -3
Diesel Oil -2	**Gasoline** -2
Mineral Oil -2	**Nitric Acid (d)** -3
Sodium Hydroxide -2	**Sulfuric Acid (d)** -3
Transmission Fluid -2	**Trichlorthane** -3
Vegetable Oil -2	

Legend: 1-No Effect; 2-Negligable Effect; 3-Moderate Effect; 4-Not Recommended; wb-Water-Based; so-Soluble Oils; d-Diluted

The above product information and specifications are based upon research and are believed to be true or exact, but do not constitute a warranty. All Apache products are sold with the understanding that the purchasers will determine the suitability of the materials for their own purpose. All products are subject to lot to lot color variation.