
Tuf Sponge - Black

Group 451BK

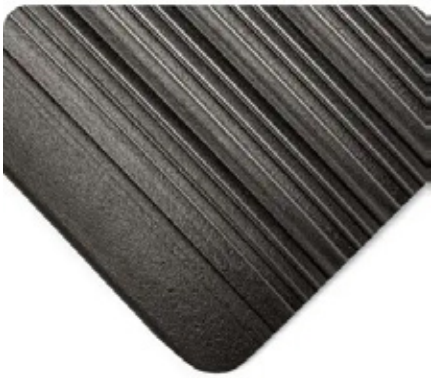

Wearwell's Tuf Sponge is for use in all dry work areas, an excellent choice for practical and economical comfort. Made from blown PVC sponge, Tuf Sponge reduces floor hardness up to 50% and can easily be custom cut to fit your work areas. 3/8" overall thickness with safety rounded edges.

- Economic comfort for light industrial applications
- Safety rounded edges
- Can easily be cut to size on-site
- Overall thickness 3/8”
- Contact us for pricing

Categories & Applications	Anti-Fatigue Matting.
Suitable Environment	Dry floors with an occasional spill. Avoid constant pooling fluids. Clean with a neutral PH cleaner.
Customization Options	C1 - Custom Length
Solid or Drainage	Solid
Material	PVC Sponge
Recycled	>10%
Warranty	1 Year

Property	Test / Result
Flammability	DOC FF1-70 / Flame Retardant Rating
Taber Abrasion	ASTM D 3884 / 2% loss
Temperature Range	0 to 110 F
Coefficient of Friction	ASTM F1677 / Dry: COF = .94 / Wet: COF = .72
Compression Deflection	ASTM D575 /.205 @ 35 psi
Tear Strength	Not Available
ESD Rating	Not Available
Dielectric Strength	Not Available

info@sarax.com.mx
818 333 3335
811 910 1772

www.sarax.com.mx

Pablo Moncayo N° 147, Colinas de San Jerónimo, Monterrey, Nuevo León